


## DODGE DURANGO INSTALLATION BASE INSTALL INSTRUCTIONS





**STEP 1:**  
REMOVE FACTORY LOAD  
FLOOR AND REAR SILL

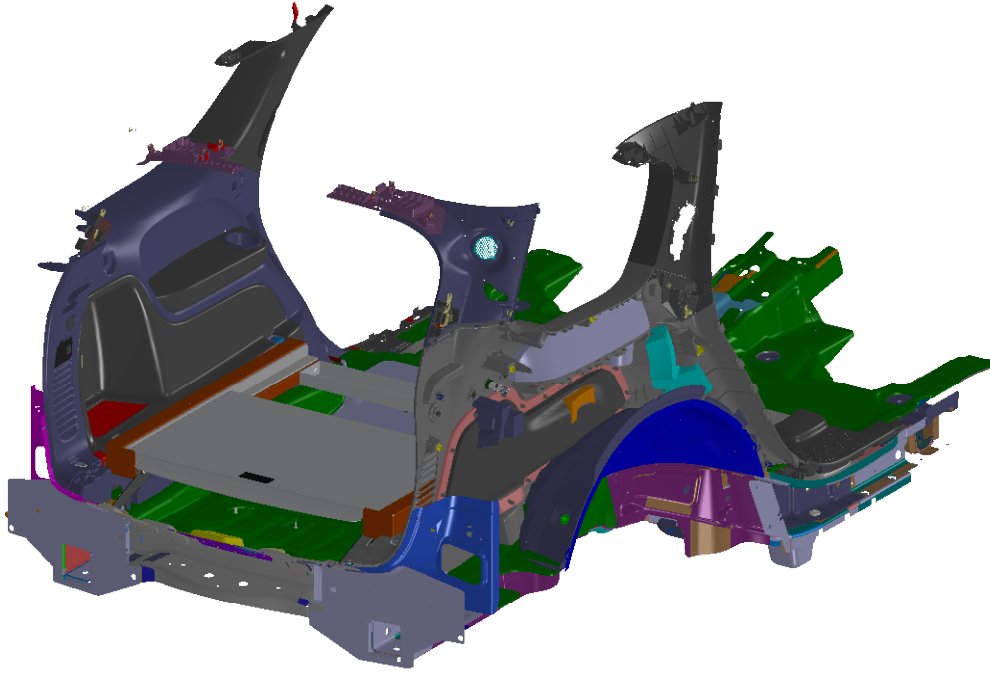

NOTE: REPLACE NUTS  
ON JACK AFTER TRIM  
HAS BEEN REMOVED



10mm



**STEP 2:**  
REMOVE PLASTIC PANELS FROM AREA



10mm







FROM REAR



18mm




FROM FRONT



18mm

STEP 3:  
REMOVE 3RD ROW  
SEAT IF EQUIPED

10mm NUT

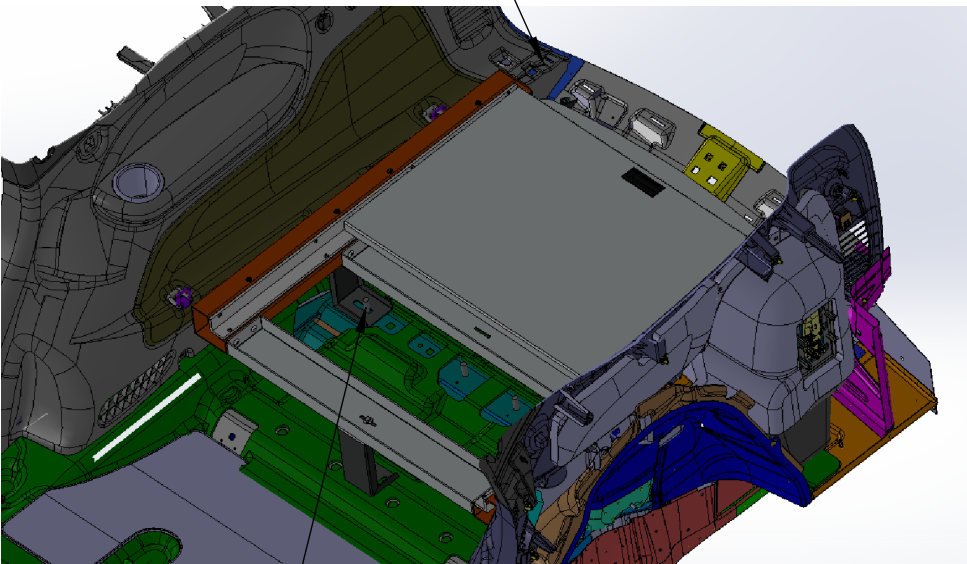

**STEP 4:  
INSTALL BASE AND REAR SILL**



18mm NUT